



Ningbo Realpower Magnetic Industry Co.,Ltd.

PMSM SERIES


Minut Pole Rectangular Magnetis Chuck

Use:

Suitable for grinding and EDM application.
Best for smaller and thinner workpiece

Featuer:

Strong magnetic force and less remaining magnetism
coolant and water proof structure
parallelism, flatness and squareness 0.005mm/100mm
Pole pitch: steel 1.5mm,brass:0.5mm
Nominal holding force:80N/cm²
Pole plate wearing limit:5mm
Magnetic field height: 8mm

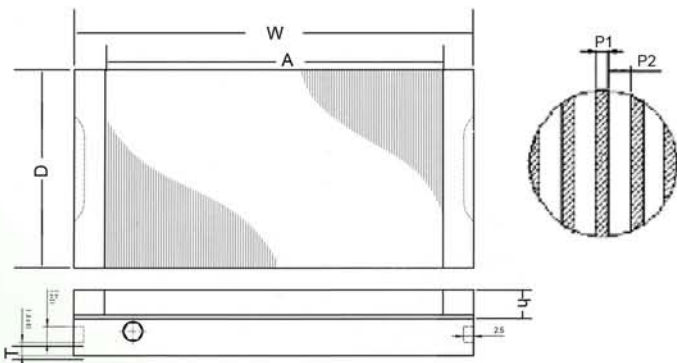

Specifications

MODEL	D	W	A	T	h	H	P=P1+P2	P=P1+P2	NET Weight	PACKING	GROSS Weight
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	kg	M.(cm)	(kg)
PMS1018	104	180	150	10	18-20	43	0.5+1.5	6.5	6.5	26x16x8	9.5
PMS1020	104	200	160			45	0.5+1.5	7.3	7.3	28x16x8	10.5
PMS1225	120	250	210			43	0.5+1.5	10.5	10.5	33x18x8	15
PMS1235	120	350	300			50	0.5+1.5	16.5	16.5	43x18x9	20
PMS1325	130	250	210			45	0.5+1.5	11.5	11.5	33x19x8	15
PMS1530	150	300	260			43	0.5+1.5	15.5	15.5	38x21x8	19
PMS1535	150	350	300			43	0.5+1.5	18.5	18.5	43x21x8	22
PMS1540	150	400	350			45	0.5+1.5	21.5	21.5	48x21x8	26
PMS1545	150	450	400			45	0.5+1.5	25	25	53x21x8	30
PMS2035	200	350	300			45	0.5+1.5	25	25	43x26x8	30
PMS2040	200	400	350			50	0.5+1.5	32	32	48x26x9	38
PMS2045	200	450	400			50	0.5+1.5	36	36	53x26x9	43
PMS2050	200	500	440			50	0.5+1.5	40	40	58x26x9	47
PMS2060	200	600	540			55	0.5+1.5	52	52	68x26x10	60
PMS2535	250	350	300			45	0.5+1.5	32	32	43x31x9	38
PMS2540	250	400	350			45	0.5+1.5	36	36	48x31x9	42
PMS2550	250	500	440			50	0.5+1.5	50	50	58x31x9	58
PMS2565	250	650	590			50	0.5+1.5	65	65	73x31x9	73
PMS3060	300	600	540			50	0.5+1.5	72	72	68x36x9	82
PMS3070	300	700	640			50	0.5+1.5	84	84	78x36x9	95
PMS3080	300	800	820	55	0.5+1.5	105	105	88x36x10	118		

other size on request